




AZ-07LF

IP INDOOR VIDEO ENTRY PHONE

Description

7" IP video indoor monitor with overhead horizontal and vertical mounting options, the ability to control the lift, display messages from the management company, PoE, connection of 32 cameras, memory for photos/videos and an autoresponder. OS - Android 10.0.

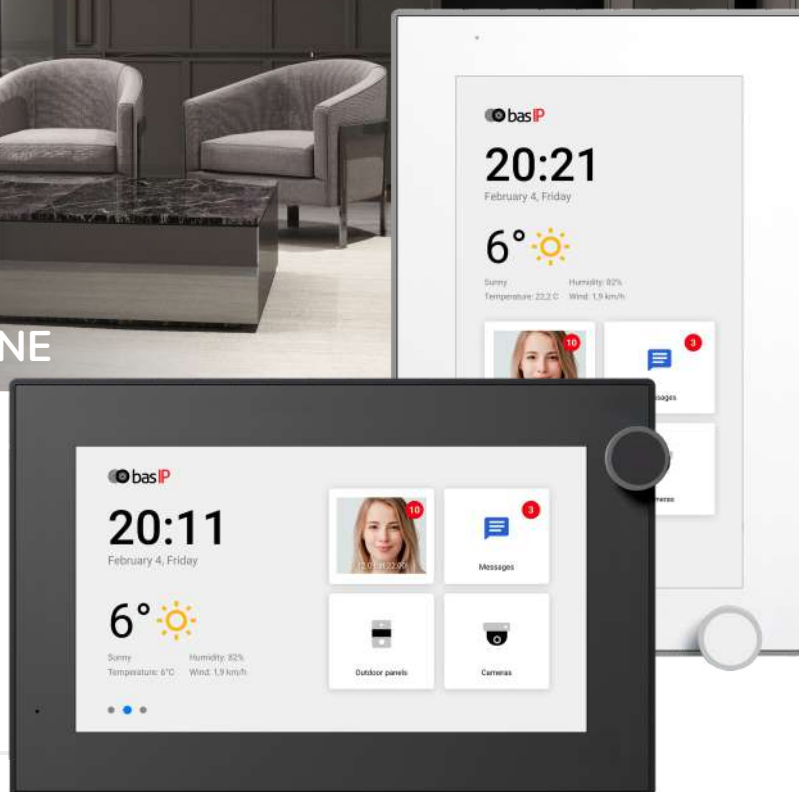



Specifications

Display	7" IPS LCD (capacitive touchscreen)
Screen resolution	1024 x 600
Built-in camera	No
Power	PoE and + 12 V DC (PSU not included)
Power consumption	6 W, standby 2.5 W
Dimensions	195 x 127 x 27 mm
Colors	Black / White
Body	Plastic
Installation Type	Wall mount
Mounting options	Horizontal and vertical

Possibilities of connection

Network connection	Ethernet wire 8P8C or Wi-Fi IEEE 802.11 2.4G (b/g/n)
Number of individual panels	Up to 9 panels
Number of multi-apartment panels	Up to 9 panels
Connection of additional monitors	Up to 8 monitors
Additional connectors	SD card slot (SDHC)
Memory function	Record photo, video and audio to SD card
Interface	Multi-language graphical and WEB interface
Number of IP cameras	Up to 32 cameras

Main features

 7" IPS LCD touch screen	 Quad splitter
 Android OS	 Slot for SD card
 Lift call	 Wi-fi connection
 Concierge call	 Third-party widget support
 Downloading custom MP3 ringtones	 Software update via Ethernet
 High definition video support	 Horizontal and vertical mounting options

Functional capabilities

Number of call ringtones
Download custom MP3 ringtones
Intercom type
Home automation control
Scene
Answering machine
Support of receiving messages
Multimedia features
Standby mode

Select the type of screensaver
in standby mode

Do Not Disturb
Silent mode
Backup photos taken during the call
Ability to install third-party applications
Support for third-party widgets

Software update

9 melodies to choose
Yes
Audio Intercom, no built-in camera
Light / curtains / lift
Yes
Yes
Yes
View video, photo and audio files from an SD card
Yes, customizable by time

Multi-camera live viewing — up to IP 4 cameras
at the same time
Clock
Photo frame
Live tour view — up to 16 cameras, time adjustable
Single IP camera live viewing.

Yes, customizable by time
Yes, customizable by time
Yes
Yes
Yes


From the web interface
From SD card
From BAS-IP updates server

Color variations



BLACK



Horizontal and vertical
mounting options

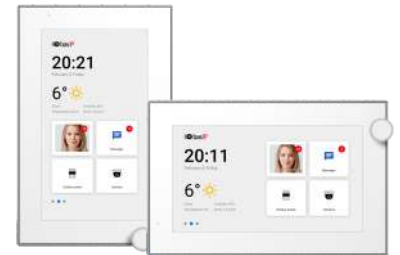



WHITE

Horizontal and vertical
mounting options

Appearance and mechanical mounting

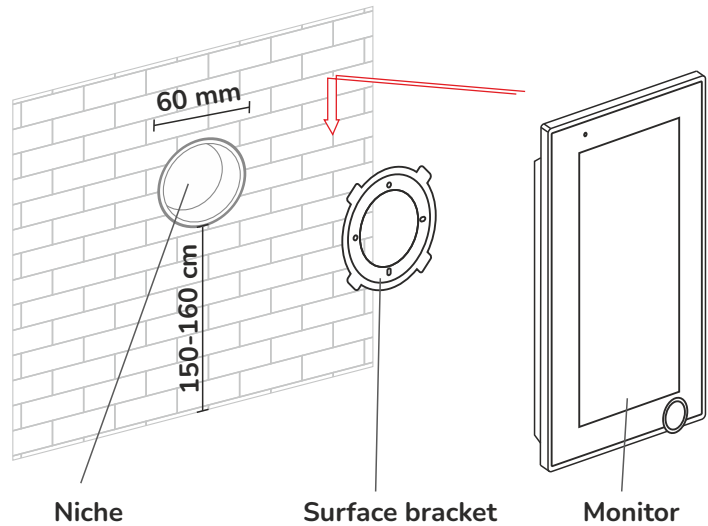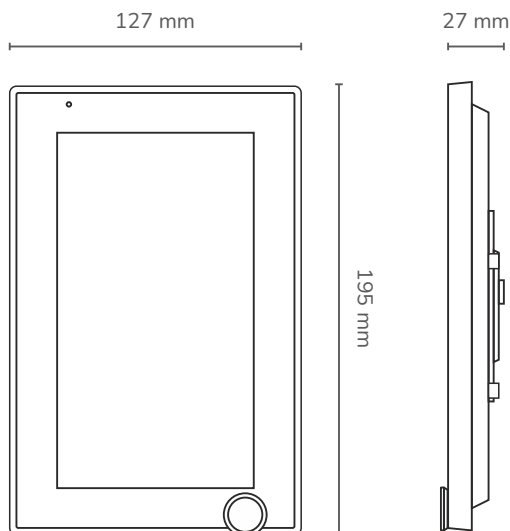

Vertical mounting

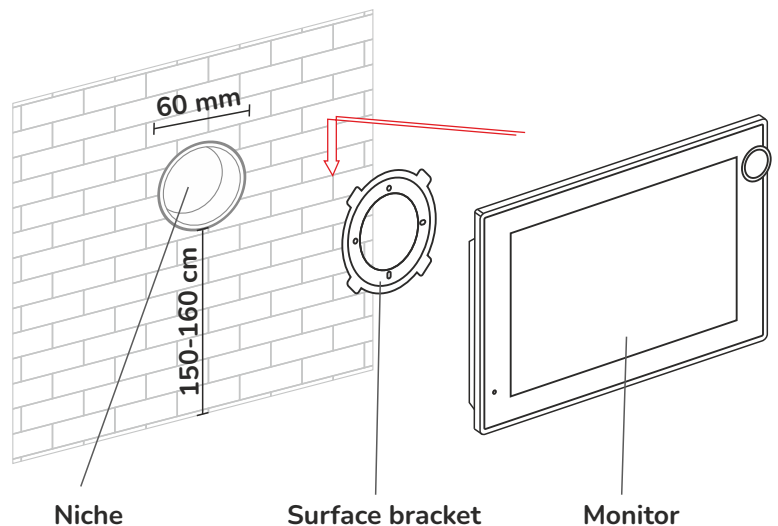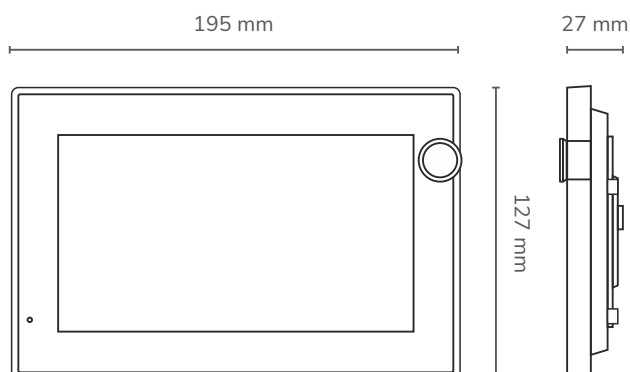

Horizontal mounting