

## DS-KV6133-WME1 IP Villa door station



- 2 MP camera with IR supplement
- One button calling design for easier calls
- Built-in card reader module
- Standard PoE power supply
- IP65 protection level with aluminum alloy casing
- Call directly to Hik-Connect APP without indoor station

## ▪ Specification


| System parameters          |                                                                                 |
|----------------------------|---------------------------------------------------------------------------------|
| Operation system           | Linux                                                                           |
| ROM                        | 32 MB                                                                           |
| RAM                        | 256 MB                                                                          |
| Processor                  | Embedded high performance processor                                             |
| Display parameters         |                                                                                 |
| Screen size                | /                                                                               |
| Operation method           | /                                                                               |
| Type                       | /                                                                               |
| Resolution                 | /                                                                               |
| Video parameters           |                                                                                 |
| Lens                       | 1                                                                               |
| Resolution                 | Main stream: 1920 × 1080p , 1280 × 720p<br>Sub stream: 1280 × 720p , 640 × 480p |
| FOV                        | Horizontal:129°,Vertical: 75°                                                   |
| Wide dynamic range (WDR)   | Support 120 dB                                                                  |
| Supplement light           | IR light, up to 2.5 m                                                           |
| Video compression standard | H.264; h.265; MJPEG                                                             |
| Audio parameters           |                                                                                 |
| Audio input                | 1 built-in omnidirectional microphone                                           |
| Audio compression standard | G.711 U、 G.711 A、 Opus、 AAC-LD、 AAC-LC、 G.726、 G.722.1                          |
| Audio output               | 1 built-in loudspeaker                                                          |
| Audio compression bitrate  | 16/32/64 Kps                                                                    |
| Audio quality              | Noise suppression and echo cancellation                                         |
| Volume adjustment          | Adjustable                                                                      |
| Capacity                   |                                                                                 |
| User capacity              | 2000                                                                            |
| Face capacity              | /                                                                               |
| Card capacity              | 10000                                                                           |
| Network parameters         |                                                                                 |
| Network protocol           | TCP/IP, RSTP, ipv6、 onvif                                                       |
| Wi-Fi                      | 2.4GHz, IEEE802.11b, IEEE802.11g, IEEE802.11n                                   |
| Bluetooth                  | /                                                                               |
| 3G/4G                      | /                                                                               |
| Device interfaces          |                                                                                 |
| Alarm input                | 4                                                                               |
| Network interface          | 1 RJ-45, 10/100 Mbps self-adaptive                                              |
| TAMPER                     | 1                                                                               |
| Exit button                | 1                                                                               |
| RS-485                     | 1                                                                               |
| USB                        | /                                                                               |
| Wiegand                    | /                                                                               |
| TF card                    | 1(Reserved)                                                                     |

|                         |                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Alarm output            | /                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Lock control            | 1 relay, Max. 30 VDC 2 A                                                                                                                                                                                                                                                                                                                                                                                                              |
| Door contact input      | 1                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Audio output            | 1 external loudspeaker(Reserved)                                                                                                                                                                                                                                                                                                                                                                                                      |
| <b>General</b>          |                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Button                  | 1 physical button                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Installation            | Surface mounting, Flush mounting                                                                                                                                                                                                                                                                                                                                                                                                      |
| Indicator               | 2                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Weight                  | Net weight: 0.190 kg Gross weight: 0.414 kg                                                                                                                                                                                                                                                                                                                                                                                           |
| Protective level        | IP65                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Working temperature     | -40 °C to 53 °C (-40 °F to 127.4 °F)                                                                                                                                                                                                                                                                                                                                                                                                  |
| Working humidity        | 10% to 95% (no-condensing)                                                                                                                                                                                                                                                                                                                                                                                                            |
| Dimension (W × H × D)   | 181.6 mm × 103.6 mm × 29.5 mm (7.1" × 4.0" × 1.1")                                                                                                                                                                                                                                                                                                                                                                                    |
| Battery                 | /                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Application environment | Outdoor                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Power consumption       | < 10 W                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Power supply            | 12 VDC, 1.5 A,IEEE802.3af, Standard PoE                                                                                                                                                                                                                                                                                                                                                                                               |
| Language                | English, Arabic, European French, Russian, European Spanish, Latin American Spanish, Italian, German, Polish, Turkish, Portuguese, Brazilian Portuguese, Uzbek, Kazakh, Czech, Hungarian, Dutch, Romanian, Bulgarian, Ukrainian, Croatian, Serbian, Greek, Lithuanian, Estonian, Latvian, Norwegian, Danish, Slovenian, Slovak, Hebrew, Swedish, Finnish, Mongolian, Vietnamese, Traditional Chinese (Taiwan), Latin American Spanish |

## ▪ Available Model

DS-KV6133-WME1

## ▪ Dimension

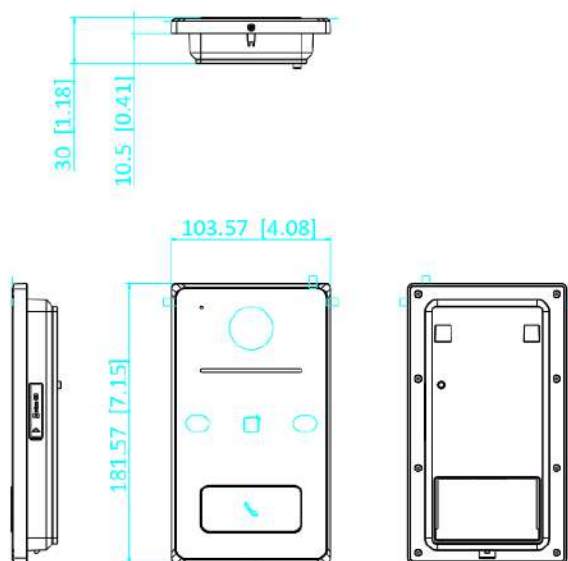

Unit:mm [inch]

SCALE 1:1

## ▪ Accessory

### ▪ Included

#### DS-KABV6133-G/ Surface



### ▪ Optional

#### DS-KABV6133-RS



# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

